


Windows made with the P15 profile system are made of een outer aluminium frame holding the glass pane and an inner ring on the inside.

Installation of P15 windows is easy and straightforward. No holes need to be drilled in the ship's hull. The windows come with a plastic gasket on the back of the flange. Also, the windows have pre-drilled holes. Installation is done by turning the supplied Parker screws into the pre-drilled holes. To complete the installation, the screws are covered with a decorative black or grey trim.

P15 windows can be fitted with single glazing or double glazing. All glazing is toughened. The glass can have a colour of clear, green, blue, bronze or smoke. Various glass thicknesses from 6 mm upwards can be chosen.

The aluminium frames can be powder-coated to any standard RAL colour or they can polished and anodised.

Available window types are: fixed, horizontal sliding, vertical sliding (drop) window, half opening with hinges in the top side and fully opening, also with the hinges in the top side

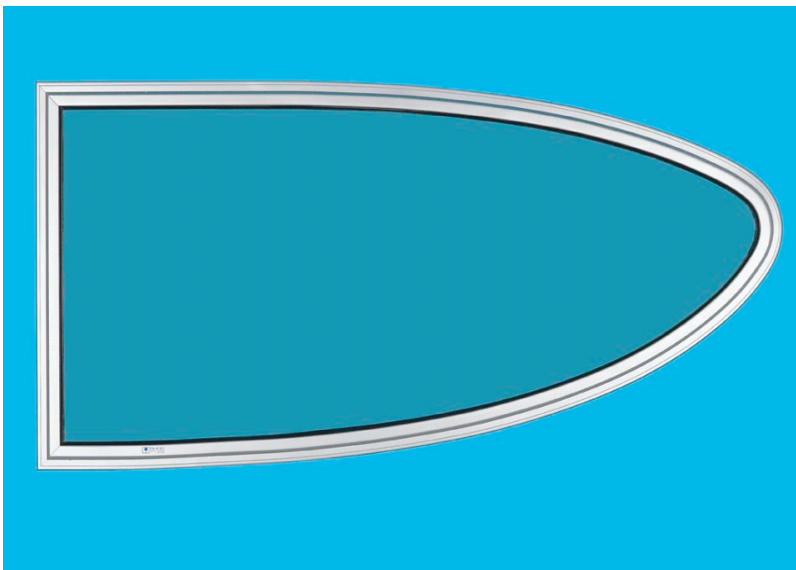

- 1- Double glazing unit
- 2- EPDM sealing rubber
- 3- Outer aluminium profile
- 4- Gasket
- 5- Spacer
- 6- Sealant
- 7- Air pocket
- 8- Inner aluminium clamping ring

